



3


Chipboard screws ClassicFast FCF II

3

Chipboard screws ClassicFast FCF II CTP BC	94	
Chipboard screws ClassicFast FCF II CTF BC	97	

The economic solution for numerous applications.

3



Head shape variants

Countersunk head with milling ribs

- Milling ribs act like small cutting edges
- Screw head is countersunk cleanly and flush into the workpiece
- For surface-flush screwing
- Can be easily sunk to create a clean surface finish
- Allows for even surfaces

Full thread screws

- Typically used for metal-wood connections
- The chipboard screw with full thread offers a high pull-out resistance thanks to the longer thread

Part thread screws

- Typically used for wood-wood connections
- The partial thread screws allow for a contraction effect



Chipboard screws ClassicFast FCF II CTP BC

Chipboard screws ClassicFast FCF II CTP BC with countersunk head , TX drive and part thread.

3



Applications

- General wood joints
- Plankings
- Skirting
- Finger tightening elements
- Wooden fences
- Typically used for wood-wood connections

Advantages

- The chipboard screws can be used universally in all wooden materials.
- The screws offer lasting safety thanks to their CE conformity.
- The countersunk head ensures an appealing surface appearance.
- The part thread creates an effect of the pulling together of the wooden parts to be joined.

Functioning

- Screws with countersunk head can be flush mounted with the wood.
- Wooden components can be pulled together with chipboard screws with a part thread.


Certificates / Features



Building materials

- Solid wood parts (soft wood)
- Veneer laminated timber
- Similar glued wood components and woodbased panels
- Oriented strand board OSB

ø 3.0

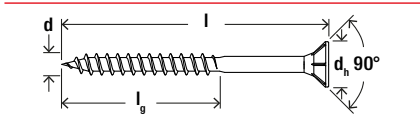


Chipboard screws ClassicFast FCF II CTP BC 3.0



ClassicFast FCF II CTP BC

Item	Item no.	Diameter d [mm]	Length l [mm]	Thread length l _g [mm]	Head-ø d _h [mm]	Drive	Sales unit [pcs]
FCF II CTP 3.0 x 40 BC 1000	573043	3.0	40	28	5.8	TX10	1,000

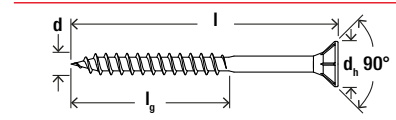


ø 3.5

Chipboard screws ClassicFast FCF II CTP BC 3.5



ClassicFast FCF II CTP BC

	Item no.	Diameter d [mm]	Length l [mm]	Thread length l _g [mm]	Head-ø d _h [mm]	Drive	Sales unit [pcs]
Item							
FCF II CTP 3.5 x 35 BC 1000	573044	3.5	35	24	6.8	TX10	1,000
FCF II CTP 3.5 x 40 BC 1000	573045	3.5	40	28	6.8	TX10	1,000
FCF II CTP 3.5 x 45 BC 1000	573046	3.5	45	30	6.8	TX10	1,000




ø 4.0

Chipboard screws ClassicFast FCF II CTP BC 4.0



ClassicFast FCF II CTP BC

	Item no.	Diameter d [mm]	Length l [mm]	Thread length l _g [mm]	Head-ø d _h [mm]	Drive	Sales unit [pcs]
Item							
FCF II CTP 4.0 x 35 BC 1000	573047	4.0	35	24	7.8	TX20	1,000
FCF II CTP 4.0 x 40 BC 1000	573048	4.0	40	28	7.8	TX20	1,000
FCF II CTP 4.0 x 45 BC 500	573049	4.0	45	30	7.8	TX20	500
FCF II CTP 4.0 x 50 BC 500	573050	4.0	50	30	7.8	TX20	500
FCF II CTP 4.0 x 55 BC 500	573051	4.0	55	36	7.8	TX20	500
FCF II CTP 4.0 x 60 BC 200	573052	4.0	60	36	7.8	TX20	200
FCF II CTP 4.0 x 70 BC 200	573053	4.0	70	42	7.8	TX20	200




ø 4.5

Chipboard screws ClassicFast FCF II CTP BC 4.5



ClassicFast FCF II CTP BC

	Item no.	Diameter d [mm]	Length l [mm]	Thread length l _g [mm]	Head-ø d _h [mm]	Drive	Sales unit [pcs]
Item							
FCF II CTP 4.5 x 40 BC 500	573054	4.5	40	28	8.8	TX20	500
FCF II CTP 4.5 x 45 BC 500	573055	4.5	45	30	8.8	TX20	500
FCF II CTP 4.5 x 50 BC 500	573056	4.5	50	30	8.8	TX20	500
FCF II CTP 4.5 x 60 BC 200	573057	4.5	60	36	8.8	TX20	200
FCF II CTP 4.5 x 70 BC 200	573058	4.5	70	42	8.8	TX20	200
FCF II CTP 4.5 x 80 BC 200	573059	4.5	80	45	8.8	TX20	200




ø 5.0

Chipboard screws ClassicFast FCF II CTP BC 5.0



ClassicFast FCF II CTP BC

Item	Item no.	Diameter d [mm]	Length l [mm]	Thread length l _g [mm]	Head-ø d _h [mm]	Drive	Sales unit [pcs]
FCF II CTP 5.0 x 40 BC 500	573061	5.0	40	28	9.8	TX20	500
FCF II CTP 5.0 x 45 BC 500	573062	5.0	45	30	9.8	TX20	500
FCF II CTP 5.0 x 50 BC 200	573063	5.0	50	30	9.8	TX20	200
FCF II CTP 5.0 x 60 BC 200	573064	5.0	60	36	9.8	TX20	200
FCF II CTP 5.0 x 70 BC 200	573065	5.0	70	42	9.8	TX20	200
FCF II CTP 5.0 x 80 BC 200	573066	5.0	80	45	9.8	TX20	200
FCF II CTP 5.0 x 90 BC 200	573067	5.0	90	54	9.8	TX20	200
FCF II CTP 5.0 x 100 BC 100	573068	5.0	100	60	9.8	TX20	100
FCF II CTP 5.0 x 120 BC 100	573069	5.0	120	70	9.8	TX20	100



ø 6.0

Chipboard screws ClassicFast FCF II CTP BC 6.0




ClassicFast FCF II CTP BC

Item	Item no.	Diameter d [mm]	Length l [mm]	Thread length l _g [mm]	Head-ø d _h [mm]	Drive	Sales unit [pcs]
FCF II CTP 6.0 x 40 BC 200	573070	6.0	40	28	11.7	TX30	200
FCF II CTP 6.0 x 50 BC 200	573071	6.0	50	30	11.7	TX30	200
FCF II CTP 6.0 x 60 BC 200	573072	6.0	60	36	11.7	TX30	200
FCF II CTP 6.0 x 70 BC 200	573073	6.0	70	42	11.7	TX30	200
FCF II CTP 6.0 x 80 BC 200	573074	6.0	80	45	11.7	TX30	200
FCF II CTP 6.0 x 100 BC 100	573075	6.0	100	60	11.7	TX30	100
FCF II CTP 6.0 x 120 BC 100	573077	6.0	120	70	11.7	TX30	100
FCF II CTP 6.0 x 140 BC 100	573078	6.0	140	70	11.7	TX30	100
FCF II CTP 6.0 x 160 BC 100	573079	6.0	160	70	11.7	TX30	100
FCF II CTP 6.0 x 180 BC 100	573080	6.0	180	70	11.7	TX30	100
FCF II CTP 6.0 x 200 BC 100	573081	6.0	200	70	11.7	TX30	100

Chipboard screws ClassicFast FCF II CTF BC

Chipboard screws ClassicFast FCF II CTF BC with countersunk head , TX drive and full thread.

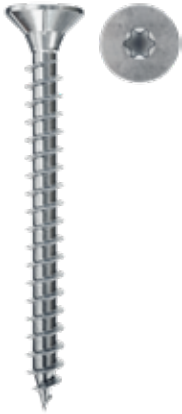

Fastening in wood

3

Applications

- General wood joints
- Plankings
- Wooden fences
- Typically used for wood-wood connections

Certificates / Features



Advantages


- The chipboard screws ClassicFast FCF II can be used universally in all wooden materials.
- The screws offer lasting safety thanks to their CE conformity.
- The countersunk head ensures an appealing surface appearance.
- The full thread offers increased extraction resistance thanks to the longer thread.

Functioning

- Screws with a countersunk head can be flush mounted with the wood.
- The chipboard screws with full thread offer a higher extraction resistance due to the longer thread.

Building materials

- Solid wood parts (soft wood)
- Veneer laminated timber
- Similar glued wood components and woodbased panels
- Oriented strand board OSB

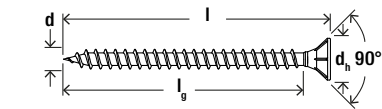

ø 3.0

Chipboard screws ClassicFast FCF II CTF BC 3.0



ClassicFast FCF II CTF BC

Item	Item no.	Diameter d [mm]	Length l [mm]	Thread length l _g [mm]	Head-ø d _h [mm]	Drive	Sales unit [pcs]
FCF II CTF 3.0 x 16 BC 1000	573082	3.0	16	12	5.8	TX10	1,000
FCF II CTF 3.0 x 20 BC 1000	573083	3.0	20	16	5.8	TX10	1,000
FCF II CTF 3.0 x 25 BC 1000	573084	3.0	25	21	5.8	TX10	1,000
FCF II CTF 3.0 x 30 BC 1000	573085	3.0	30	26	5.8	TX10	1,000